

CELLENI TILE INSERT GRATE

lauxes



LIFETIME
Rustproof
WARRANTY

Lauxes 'Celleni' Floor Grates are fast becoming the go to option for creating spacious, elegant and modern bathroom designs. Designed with style and functionality in mind, this grate made from triple anodised aluminium, is robust, cost effective and easily customisable.

With Lauxes 'Celleni' Floor Grates there is no compromise on functionality or style when creating designer living spaces.


Key Features Include:

- Available in lengths up to 5.6m (ability to extend further using Lauxes joiners)
- Easy to cut to desired length
- Easy to clean (easy roll out system)
- No welding required
- No major plumbing involved as waste can be positioned anywhere along the bottom tray.

Available in the following three styles:

Slimline Tile Insert (LCSTIGRATEK)
Slimline Tile Insert (Midnight) (LCMSTIGRATEK)
Tile Insert Plus (LCTIGRATEK)

SPECIFICATIONS


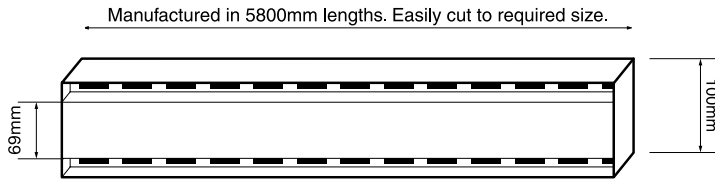


Plus

Slimline

TIP: Perfect for tiles up to 18mm thick

STI: Perfect for tiles up to 11mm thick



Slimline Tile Insert (LCSTIGRATE)
Perfect use for tiles up to 11mm thick.




Slimline Tile Insert (Midnight)
LCMSTIGRATE
Perfect use for tiles up to 11mm thick.

CUTTING & ASSEMBLY INSTRUCTIONS


For ease of cutting Lauxes grates, we recommend the use of a compound mitre saw fitted with a multi-material cutting blade 80 tooth or more. We also recommend using a Lauxes TCT hole saw to drill the hole for the waste outlet.

1. Cut the bottom tray 3mm shorter than desired length to allow end caps to be fitted.
2. Cut the top grate 1mm shorter than the bottom tray to allow for easy roll in of top grate and tidy fit.
3. Using the suitable size Lauxes hole saw for your pop waste, drill out the hole at the required position to align with the waste pipe in the floor.
4. Insert the end caps into the bottom tray and secure with a bead of silicone on the inside of the tray.
5. Place silicone around the lip of the pop waste and secure to the underside of the bottom tray at the recently drilled hole.



Silicone the top part of the waste outlet, as shown.

Installation to be by a licensed plumber and in accordance with AS/NZS 3500.2.

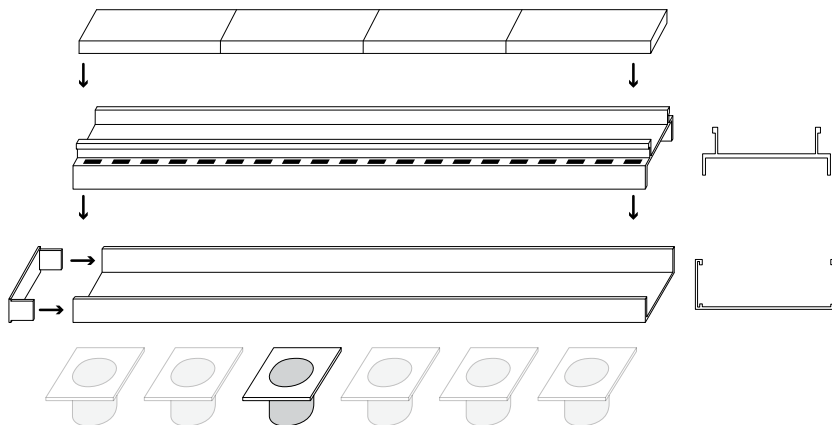

Position Pop Waste anywhere beneath the tray.



Tile Insert Plus (LCTIGRATE)
Perfect use for outdoor applications.
Holds tiles up to 18mm thick.



WM - 022370
WMTS.040

Disclaimer:

All Lauxes grates and accessories have received WaterMark Certification in accordance with WMTS - 040. Warranty information, as well as Care & Maintenance can be found at www.lauxesgrates.com.au

